

## SPECIFICATIONS

Thermodynamic Cycle	Diesel 4 stroke	
Air Handling	TCA	
Bore x Stroke	millimeters	95.8 x 104
Total Displacement	liters	3
Valves per cylinder	number	4
Cooling System	liquid	
Direction of Rotation	viewed facing flywheel	CCW
Compression ratio	17.2 : 1	
Injection System	ECR	
Arrangement	4L	

## PERFORMANCES

Peak power	kW (HP) @ rpm	129 ( 175 ) @ 3500
Peak torque	Nm (kgm) @ rpm	430 (44) @ 1600
High idle speed	rpm	-
Low idle speed	rpm	±
Minimum starting temperature without auxiliaries	°C	-25°
Oil and oil filter maintenance interval for replacement	kilometer	-

## STANDARD CONFIGURATION

Flywheel housing	type	n.a.
Flywheel size	inch	11"
Intake manifold location	middle high / left side	
Exhaust manifold location	middle high / right side / back	
Turbocharger	Variable Geometry Turbocharger	
Turbocharger location	back / right side	
Fan transmission ratio	1.25:1	
Distance between fan - crankshaft centers	millimeters	X=-50 Y=180
Fuel filter	number	n.a.
Oil filter	number	single cartridge - left side
Oil sump	suspended sheet steel / front sump	
Oil vapours blow-by circuit	close case ventilation	
Oil heat exchanger	integrated into the block	
Oil filler	on front cover	
Starter	12V - 2.5 kW	
Alternator	12 V (110 A - 140 A)	
Engine stop device	by electronic control unit	
Wiring harness	interface wiring loom with accessories	
Painting color	n.a.	
Air compressor	-	
Hydraulic steering pump	liters-minute	-
Maximum torque available from crankshaft pulley	newton-meter	150.000

## WEIGHT AND DIMENSIONS


Dimensions	LxWxH (mm)	617 x 653 x 798
Dry Weight	Kg	247

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

## POWER & TORQUE

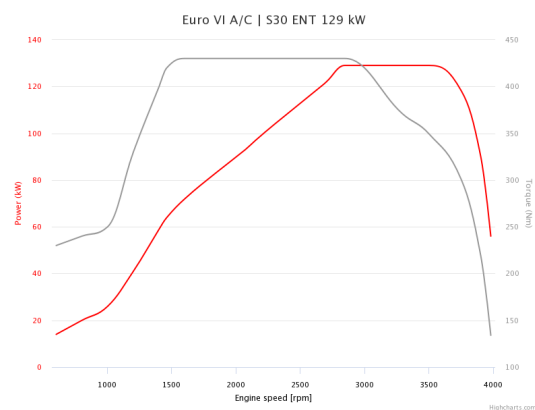

## NOT INCLUDED IN STANDARD CONFIGURATION

Power Take Off (PTO)	-	
PTO - transmission ratio	-	
PTO - maximum available torque	---	
Battery - minimum capacity recommended	Ah	110 Ah (24 V)
Battery - minimum cold cranking capacity recommended	Ah	n.a.

## LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Emission standard	Exhaust System
L (in line)	TCA (Turbocharged with aftercooler)	WG (Wastegate)	M (Mechanical)	EEV (Enhanced Environmentally friendly Vehicle)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	TC (Turbocharged)	VGT (Variable Geometry Turbocharger)	ECR (Electronic Common Rail)		SCR (Selective Catalytic Reduction)
	NA (Naturally Aspirated)	TST (Twin Stage Turbocharge)	EUI (Electronic Unit Injector)		
			MPI (Multi Point Injection)		

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE



# AFTER TREATMENT SYSTEM

HI-eSCR After Treatment System includes Diesel Oxidation Catalyst (DOC), Diesel Particulate Filter (DPF), Selective Catalytic Reduction (SCR) and Clean-Up Catalyst (CUC)

ON ROAD

## LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Exhaust System
L (in line)	TCA (Turbocharged with aftercooler)	WG (Wastegate)	M (Mechanical)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	TC (Turbocharged)	VGT (Variable Geometry Turbocharger)	ECR (Electronic Common Rail)	SCR (Selective Catalytic Reduction)
	NA (Naturally Aspirated)	TST (Twin Stage Turbocharge)	EUI (Electronic Unit Injector)	
			MPI (Multi Point Injection)	

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

